

FAIRBANKS®

S C A L E S



FB6000 SERIES

INTALOGIX® INSTRUMENTS — MODELS 6011, 6012, 6013

High performance, user-friendly digital instruments
for vehicle weighing applications.

Fairbanks.com

FB6000 SERIES

INTALOGIX® INSTRUMENTS — MODELS 6011, 6012, 6013

Powerful digital solution for legal-for-trade, inbound/outbound weighing applications.

Your vehicle scale is an essential and critical component of your daily business operations. Weighing equipment that is flexible, reliable and durable is not a luxury, it is a requirement.

For more than 180 years, Fairbanks Scales has led the vehicle weighing industry with products that fit customer application needs —

needs like yours. The FB6000 Series Instrument carries this tradition forward as the dependable weighing solution for your operation.

The FB6000 features three modes of operation, three enclosure styles, built-in traffic controls, multiple communication ports and transaction export functions to meet your application requirements.

Washdown Desktop/Wall Mount Enclosure



Panel Mount Enclosure



Stainless steel and powder coated NEMA 12 enclosure

Bright red, 16-segment LED with adjustable intensity

Raised keys provide tactile feedback and audible notification when pressed.

Desktop Enclosure



Front panel navigation keys

Full numeric keypad with oversized keys

Intalogix® Technology Innovation at its best

Intalogix® Technology is a unique method of digital load cell communication that works by converting a weak analog load cell signal to a stronger, more reliable digital interface. Regardless of the nature of your application, Intalogix®

Technology allows you to operate with an unsurpassed degree of resolution and accuracy. No other technology on today's market comes close to achieving the digital advantages and lightning/surge protection of Intalogix®.

Function Key Features *(See callouts above)*

- | | | |
|---|---|---|
| <p>1 UNITS — Four selectable units of measure:</p> <ul style="list-style-type: none"> • Pounds • Kilograms • Tons • Tonnes | <p>2 B/G / NET — One-push selection from Gross weight to Net weight.</p> | <p>5 TRAFFIC LIGHT CONTROLS — Complete manual traffic light control at the touch of a key.</p> |
| | <p>3 ZERO — Quickly “zero off” weight on the scale.</p> | <p>6 TARE — Use to accept the displayed weight as the transaction Tare value.</p> |
| | <p>4 PRINT — Initiates basic print function.</p> | <p>7 IN / OUT — Use to obtain the Net weight of an incoming/outgoing vehicle by capturing its Gross and Tare values.</p> |



With Fairbanks' FB6000 Instruments, you don't have to pay for expensive features that are not applicable to your business. Fairbanks has taken the essential instrument functions used in sophisticated, high-traffic vehicle weighing and packaged it into economical, yet attractive steel enclosures perfect for office, industrial or washdown environments.

FB6000 Instruments transmit weight data through a serial connection to a personal computer for scale software interfacing, or transfer .csv

transaction files directly to a USB flash drive.

FB6000 Instruments are smart enough to identify and match inbound and outbound vehicles, store up to 1000 tare weights, and capture truck identification. They also integrate with all manufacturers' analog scales and popular traffic light controls. These, and many other exciting features, make FB6000 Instruments the perfect economical choice to replace an old or failed analog instrument, or create a new basic weighing system.

Standard Features

- Bright red, 16-segment, LED display
- Transaction export (CSV) functions
- Gross - Tare - Net weigh mode
- Inbound / Outbound weigh mode
- One programmable prompt
- Front panel traffic control

Accessory Interfaces

ACC 1
Internal Active or
Passive 20 mA Interface

ACC 2
High resolution 4-20 mA or
Traffic light interface card

ACC 3
Remote switch controls four internal inputs:
• Zero • Print • Units • Gross / Net

Power port

Approvals



USB

Three (3) standard USB 2.0 ports are available for connecting a USB keyboard and USB flash drives for data transport.

Serial

Three (3) dedicated RS232C ports for connecting to computers, printers and other serial devices.

All three enclosure styles feature the interfaces and ports shown on the desktop model above.

Modes of Operation

Gross - Tare - Net Mode (GTN)

GTN mode allows the scale operator to process weighments with or without the use of a keyboard-entered Tare or Autotare by simply pressing the PRINT key.

Inbound / Outbound Mode (In/Out)

This mode allows the Operator to weigh a vehicle "In" and temporarily store the transaction using a Loop ID (numeric only). When the vehicle returns to the scale to exit the facility, simply press the "Out" key to recall the Inbound weighment and complete the transaction with Gross, Tare and Net values. In/Out mode supports up to 1000 stored Tares.

Basic In / Out Mode (1 button weighing)

This Basic In/Out mode is designed for applications in which no calculated NET weight is desired. After entering the scale, a loaded vehicle's weight is captured by pressing the GROSS PRINT button — an empty vehicle is captured by pressing the TARE PRINT button.

FB6000 SERIES

INTALOGIX® INSTRUMENTS — MODELS 6011, 6012, 6013


Weighing Solutions for the World Since 1830

Fairbanks.com


SPECIFICATIONS

Enclosures	Model FB6011- Desktop - Stainless steel and powder coated steel, NEMA 12 Model FB6012 - Desktop/Wall mount - Stainless steel, NEMA 4X Model FB6013 - Panel mount - Stainless steel and powder coated steel, NEMA 4X
Processor	1 GHz Quad Core
Memory	1 GB
On-board storage	2.4 GB
Number of scales	1
Display	Bright red, 16-segment, LED with adjustable intensity
Units	lb, kg, ton and tonne
Keypad	Oversized keys: 0-9, Decimal point, Enter, 9 control keys
Load cells	Ten 350 ohm cells, 16 1000 ohm cells
Outputs	Three (3) RS232C ports, Three (3) USB 2.0 ports, One (1) dedicated optically isolated 20mA
Remote switch inputs	Zero, Print, Units and Gross/Net
Power requirements	100 to 130 VAC or 200 to 260 VAC; 50/60 Hz
Clock	Real time clock, 12-hour a.m./p.m., Date (month/day/year)
Displayed characters	0.80" tall
Display resolution	10,000 divisions commercial, 50,000 divisions for non-commercial
Capacity	Programmable to 999,999
Displayed units	4 primary and 4 secondary
Programmable fields	1
Stored tares	1,000
Transaction records	100,000
Humidity	0 to 90% (FB6011) 0 to 100% (FB6012 and FB6013 enclosures)
Accuracy	Class III/IIIL
Accessories	4-20 mA (passive, 16 bit), Traffic light control card, Peripheral devices: Ticket printer, tape printer, remote displays, traffic light, traffic light control box, 105 key QWERTY keyboard, 87 key QWERTY keyboard
Approvals	NTEP CC# 12-099, MC# AM-5878, ETL


DIMENSIONS - FB6011 - DESKTOP

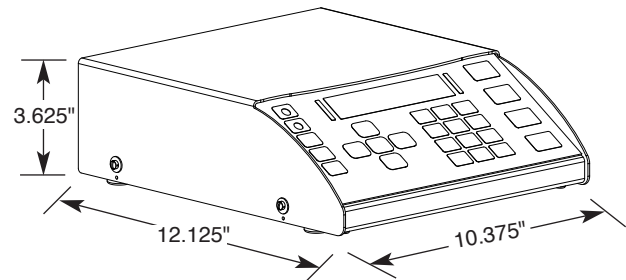

DIMENSIONS - FB6012 - WASHDOWN

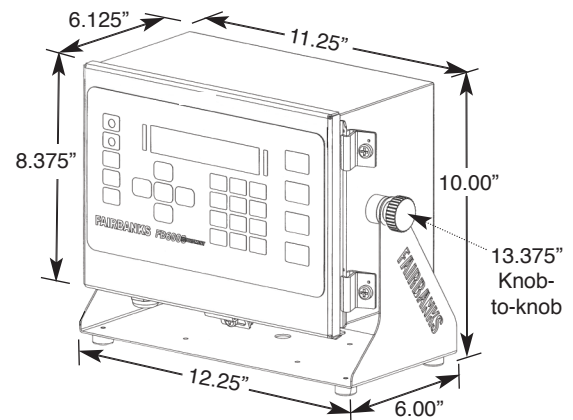

DIMENSIONS - FB6013 - PANEL MOUNT

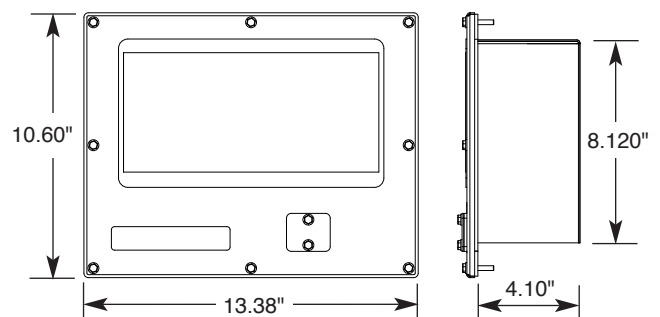

Your Fairbanks Scales Authorized Representative is:

Call toll-free for the representative nearest you:

(800) 451-4107

Call between 8:00 a.m. – 5:00 p.m. Central Time
Corporate Offices: 821 Locust • Kansas City, MO 64106 • (816) 471-0231
Internet Address: <http://www.Fairbanks.com>



St. Johnsburry manufacturing
facility registered in
compliance with ISO 9001.

